



ALDEBARAN® RAPTOR PRO RP2000 LED

Aldebaran Raptor

Article No.: **1410000868**

6,04

KG

IP67

IP CODE

26.000

LUMEN

24.300

REAL-LUMEN

Description

ALDEBARAN® RAPTOR RP PRO LED SERIES

Efficiency and universal application were the basic ideas in the consistent development of the popular ALDEBARAN® RAPTOR RP LED SERIES.

The professional versions have in addition to the high light output and, modeled on the classic halogen spotlights, Abstrahlcharakteristik the PRO LED SERIES some additional features:

Whether integrated bolt receiver for quick and tool-free mast assembly or fold-out stand for the spontaneous installation on the ground. With the ALDEBARAN® RAPTOR RP PRO SERIES there's no use without the right light.

the professional benefits of ALDEBARAN® RAPTOR RP LED SERIES is completed by the practical and also integrated cord storage.

Product Highlights

- Use of energy-saving LED technology
- Impact resistant according to IK10
- lightweight aluminum housing
- Stainless steel bracket with fold-out base
- Mast mounting using the bolt receiver
- Cable winder
- Homogeneous, glare-free light image thanks to the asymmetrical SETO XPECT® lens system

Technical Specifications

General Data

Attribute	Value	Unit
Brand	ALDEBARAN®	
Series	RAPTOR	
Model	PRO RP2000 LED	
Temperature (min)	-40	°C
Temperature (max)	+59	°C
Dimensions	340 x 300 x 155	mm
Weight	6,04	kg
IP Class	IP67	

Technical Specifications (cont.)

General Data

Attribute	Value	Unit
Plug	Schuko IP68 blue	
Cable Length	5	m
Feature	cable reel, stand, bolt receiver	


Lighting Data

Attribute	Value	Unit
Luminant	2x SETO XPECT®2 LED module	
Luminous Flux	26000	lm
Luminous Flux (real)	24300	lm
Colour Temperature	5000	K
CRI	>70	
Beam Angle	40 / 60	°
Durability	50000	h

Electrical Data

Attribute	Value	Unit
Input Voltage	100-240	V
Mains Frequency	50/60	Hz
Type of Current	AC	
Power Consumption	150	W
Protection Class	I	

Additional Product Images

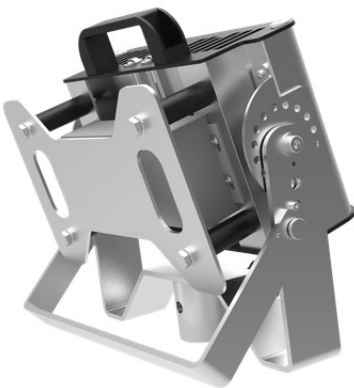

Additional Product Images (cont.)



Setolite Lichttechnik GmbH
Bockhackerstr. 13
42499 Hückeswagen
Germany

Tel./Fax
+49 2192 / 93624-0
+49 2192 / 93624-25

Web/Email
www.setolite.com
info@setolite.de

