

ALDEBARAN® SMARTLINE RP110 LED COMFORT EM



Aldebaran Smartline

Article No.: 1417242303

3,60

KG

IP54

IP CODE

5.800

LUMEN

Description

The lights of ALDEBARAN® SMART LINE SERIES convince with flexibility and efficiency. The simple, timeless design combines a modular basic design with the advantages of modern and energy-saving LED technology.

In conjunction with high-quality components such as the anodized aluminum housing, toughened front glass of PMMA and cold-resistant end caps a durable quality product is produced. Various possibilities for mounting, suspension and set-up to maximize potential for the use of SMARTLINE lights.

In addition, help options such as motion detection means modernster microwave technology * and the variable 'Light on Demand' control energy saving potential significantly better use. Low weight and reduced height make it easy to logistical side of unbeatable advantages.

Product Highlights

- Anodized aluminum housing
- Impact-resistant, convex windscreen milky (PMMA)
- Homogeneous light
- Compact transport dimension
- Light weight
- Emergency light function

Technical Specifications

General Data

Attribute	Value	Unit
Brand	ALDEBARAN®	
Series	SMARTLINE	
Model	RP110 LED COMFORT EM	
Temperature (min)	-10	°C
Temperature (max)	+40	°C
Dimensions	610 x 160 x 105	mm
Weight	3,60	kg
Front Window	PMMA (milky)	
IP Class	IP54	
Plug	Schuko IP44	
Socket	Schuko IP54	

Technical Specifications (cont.)

General Data

Attribute	Value	Unit
Cable Length	5	m


Lighting Data

Attribute	Value	Unit
Luminant	LED STRIP-TECHNOLOGY	
Luminous Flux	5800	lm
Luminous Flux during Emergency Mode	500	lm
Colour Temperature	4000	K
CRI	>80	
Durability	50000	h
Operating Time during Emergency Mode	1	h

Electrical Data

Attribute	Value	Unit
Input Voltage	220-240	V
Mains Frequency	50/60	Hz
Type of Current	AC	
Power Consumption	46	W
Protection Class	I	
Battery Type	LiFePO4	
Battery Voltage	6,4	V
Battery Capacity (Cell)	3600	mAh

Additional Product Images

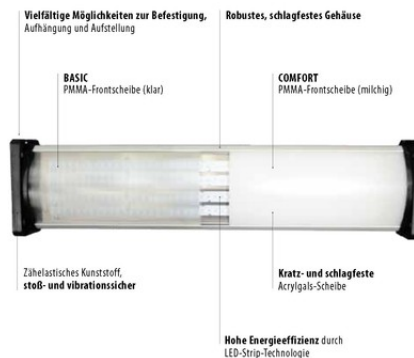

Setolite Lichttechnik GmbH
 Bockhackerstr. 13
 42499 Hückeswagen
 Germany

Tel./Fax
 +49 2192 / 93624-0
 +49 2192 / 93624-25

Web/Email
 www.setolite.com
 info@setolite.de

